

# IC-F1610 IC-F2610



The photo shows actual size.

## Versatile, multi-function PMR

- **Keypad with backlighting and dot matrix, multi-function display**

The keypad on the front panel allows direct input of memory channels, DTMF codes, tone frequencies and SmarTrunk II™ codes. Backlighting ensures smooth input even during nighttime operation. The display shows a wide variety of information at a glance. In addition to various icons, 2 lines of dot matrix characters (of up to 16 characters per line) show important operating status items such as channel number, programmable key functions, etc., depending on programming.

- **Superior receiver performance**

Improved, high-performance IMD characteristics.

- **Flash ROM CPU**

- **Detachable front panel\***

The detachable front panel provides installation flexibility and is easy to install in a number of vehicle types.


\*Optional RMK-1 and OPC-609 are required.

- **Selectable channel spacing**

(channel independent)

- **Optional RS-232C interface\***

\*Based on RS-232C; ask your local dealer for details.

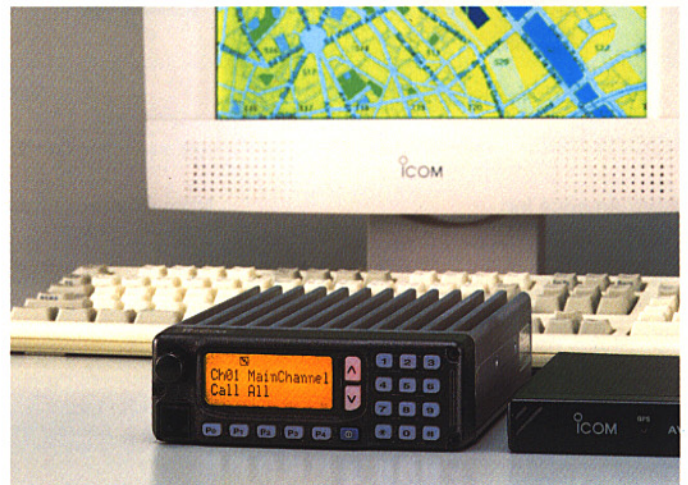

**ADDITIONAL FEATURES**

- Rugged, dependable construction
- 7 customizable keys available
- Built-in CTCSS, DTCS encoder/decoder
- 5-tone encoder/decoder standard (depending on version)
- Numerous 5-tone formats available
- Answer back function for 5-tone signalling
- SmarTrunk II™ compatible with optional UT-105
- Ample 128 memory channels; can be expanded to 256 with optional EX-1761
- Password function to prevent unauthorized operation
- Maintenance-free EEPROM for memory backup
- Adjustable minimum AF level
- 51 CTCSS frequencies plus 1 programmable
- Selectable DTCS polarity
- Time-out timer, TOT penalty timer and TOT ID transmission

- Hanger function
- Normal and priority scan
- 10 scan channel groups and 2 priority channels
- 10 DTMF autodialing memories
- Temporary simplex operation on a duplex channel capability (talk around function)
- Transmit lockout (channel busy/repeater/reverse repeater)
- Automatic priority channel selection and/or receive mute release when microphone is picked up
- Powerful, external speaker (optional for some versions)
- 3 selectable transmit output powers—High, Low-2 and Low-1
- Optional AVL (Automatic Vehicle Location) system capability
- Advanced programming for PC/AT; Microsoft® Windows® 95  
Microsoft and Windows are registered trademarks of Microsoft Corporation in the U.S.A. and other countries.

**SPECIFICATIONS**

**GENERAL**

- Frequency coverage (Varies according to versions):  
IC-F1610 136–155 MHz 146–174 MHz  
IC-F2610 400–430 MHz 440–490 MHz 490–520 MHz
- Number of channels : 128 or 16 ch × 8 banks  
256 or 16 ch × 16 banks; with EX-1761
- Type of emission : 8K50F3E (12.5 kHz; narrow)  
16K0F3E (25 kHz; wide)
- PLL channel step : 5 kHz, 6.25 kHz and 7.5 kHz
- Frequency stability : ±1500 Hz
- Operating temp. range : -20°C to +55°C
- Power supply voltage: 13.2 V DC (negative ground)
- Current drain (typical):  
Tx at 25 W 5.0 A (IC-F1610)  
6.0 A (IC-F2610)  
Rx max. audio 0.8 A  
standby 400 mA
- Antenna connector : SO-239 (50 Ω)
- Dimensions : 150(W) × 50(H) × 180(D) mm
- Weight : 1.5 kg

**TRANSMITTER**

- Output power : 25 W or 10 W  
(at 13.2 V DC) (according to country)
- Modulation system : Variable reactance frequency modulation
- Max. freq. deviation : ±2.5 kHz (narrow)  
±5.0 kHz (wide)
- Spurious emissions : 0.25 µW
- Adjacent ch. power : 60 dB (narrow)  
70 dB (wide)
- Audio harmonic dist. : 5% at 40% deviation
- Residual modulation : 50 dB typical (narrow)  
(with CCITT filter) 55 dB typical (wide)
- Mic. connector : 8-pin modular (600 Ω)

**RECEIVER**

- Intermediate freq. : 1st 21.75 MHz (IC-F1610)  
30.875 MHz (IC-F2610)  
2nd 455 kHz
- Sensitivity : -2 dBµV (emf; at 20 dB SINAD)
- Squelch sensitivity :  
IC-F1610 -6 dBµV (emf; threshold)  
IC-F2610 -4 dBµV (emf; threshold)
- Adj. ch. selectivity : 60 dB (narrow)  
70 dB (wide)
- Spurious response : 70 dB
- Intermodulation : 70 dB typical
- Audio output power : 3.5 W at 10% distortion with a  
4 Ω load
- Ext. SP connector : 2-conductor 3.5 (d) mm/4 Ω

Measurements made in accordance with ETS 300 086. All stated specifications are subject to change without notice or obligation.

**Supplied Accessories**

- Hand microphone
  - DC power cable
  - Mounting bracket kit
  - External speaker\*
  - Fuses
- \*depending on version

**OPTIONS**

- **EX-1761 MEMORY EXPANSION UNIT**
- **OPC-617 ACC CABLE**  
For external terminal connection.
- **RMK-1 SEPARATION KIT**  
+ **OPC-609 SEPARATION CABLE**  
For separate front panel installation (1.9 m).
- **UT-96 5-TONE UNIT**  
Provides the transceiver with 5-tone decoder capabilities (supplied with some versions).
- **UT-105 SmarTrunk II™ Logic Board\***  
\*SmarTrunk II™ is a trademark of SmarTrunk Systems Inc.
- **UT-103 FFSK BOARD**

- **SM-25 DESKTOP MICROPHONE**
- **SP-10/SP-22 EXTERNAL SPEAKERS**
- **AV-100C AVL SYSTEM CONTROLLER**  
+ **OPC-821 AVL SYSTEM CABLE**
- **OPC-822 INTERFACE CABLE**
- **HM-100TN DTMF MICROPHONE**



Icom Inc.

1-1-32, Kamiminami, Hirano-ku, Osaka 547-0003, Japan Phone: 06 6793 5302 Fax: 06 6793 0013 URL: <http://www.icom.co.jp/world/index.html>

Count on us!

**Icom America Inc.**

<Corporate Headquarters>  
2380 116th Avenue N.E., Bellevue, WA 98004, U.S.A.  
Phone : (425) 454-8155 Fax : (425) 454-1509  
URL : <http://www.icomamerica.com>  
<Customer Service> Phone : (425) 454-7619

**Icom Canada**

Glenwood Centre #150-6165 Highway 17,  
Delta, B.C., V4K 5B8, Canada  
Phone : (604) 952-4266 Fax : (604) 952-0090  
URL : <http://www.icomcanada.com>

**Icom (Australia) Pty. Ltd.**

A.B.N. 88 006 092 575  
290-294 Albert Street, Brunswick, Victoria, 3056, Australia  
Phone : 03 9387 0666 Fax : 03 9387 0022  
URL : <http://www.icom.net.au>

**Asia Icom Inc.**

6F No. 68, Sec. 1 Cheng-Teh Road, Taipei, Taiwan, R.O.C.  
Phone : (02) 2559 1899 Fax : (02) 2559 1874

**Icom (Europe) GmbH**

Communication Equipment  
Himmelgeister Str. 100, D-40225 Düsseldorf, Germany  
Phone : 0211 346047 Fax : 0211 333639  
URL : <http://www.icomeurope.com>

**Icom Spain S.L.**

Ctra. de Gracia a Manresa Km. 14,750  
08190 Sant Cugat del Valles Barcelona, SPAIN  
Phone : (93) 590 26 70 Fax : (93) 589 04 46  
URL : <http://www.icomspain.com>

**Icom (UK) Ltd.**

Unit 9, Sea St., Herne Bay, Kent, CT6 8LD, U.K.  
Phone : 01227 741741 Fax : 01227 741742  
URL : <http://www.icomuk.co.uk>

**Icom France S.a**

Zac de la Plaine, Rue Brindejonc des Moulinais  
BP 5804, 31505 Toulouse Cedex, France  
Phone : 561 36 03 03 Fax : 561 36 03 00  
URL : <http://www.icom-france.com>



Certificate Number Q14190

Icom Inc. (Japan), is an ISO9001 certification acquired company.

Your local distributor/dealer: